


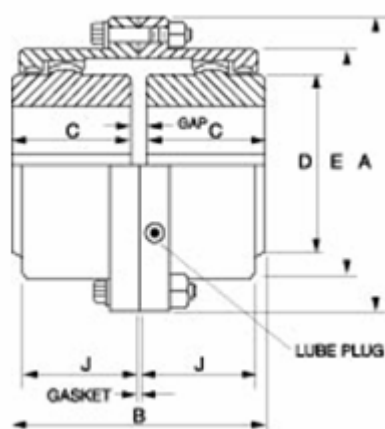

Size	HP per 100 rpm	Max. Speed (rpm)	Basic Torque (N·m)	Bore Dia (mm)		Dimensions(mm)						Gap	Cplg Wt(kg)	Lube Wt(kg)
				Max.	Min.	A	B	C	D	E	J			
1010G20	12	8.000	859	48	13	116	89	43	69	84	39	3	4.5	0.04
1015G20	27	6.500	1.934	60	19	152	101	49	86	105	48	3	9.1	0.07
1020G20	50	5.600	3.581	73	25	178	127	62	105	126	59	3	15.9	0.11
1025G20	90	5.000	6.446	92	32	213	159	77	131	155	72	5	25.9	0.23
1030G20	150	4.400	10.743	105	38	240	187	91	152	180	84	5	43.1	0.36
1035G20	23	3.900	16.473	124	51	279	218	106	178	211	98	6	68.0	0.54
1040G20	350	3.600	25.067	146	64	318	248	121	210	245	111	6	97.5	0.91
1045G20	480	3.200	34.378	165	76	346	278	135	235	274	123	8	136.1	1.04
1050G20	650	2.900	46.553	178	89	389	314	153	254	306	141	8	190.5	0.77
1055G20	850	2.650	60.877	197	102	425	344	168	279	334	158	8	249.5	2.22
1060G20	1.100	2.450	78.782	222	114	457	384	188	305	366	169	8	306.2	3.18