


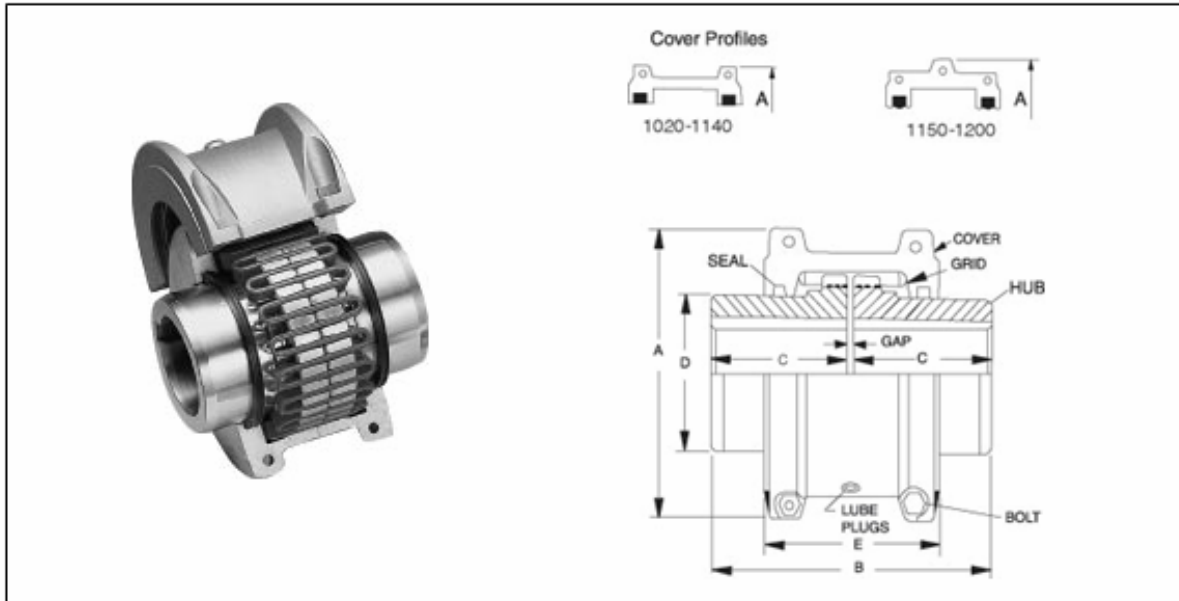

Size	HP Per 100 rpm	Max. Speed (rpm)	Basic Torque (N·m)	Bore Dia. (mm)		Dimensions (mm)					Gap (mm)			Cplg Wt (kg)	Lube Wt (kg)
				Max.	Min.	A	B	C	D	E	Min.	Nor.	Max.		
1020T10	0.68	4.500	49	30	12	101.6	98.0	47.5	39.7	66.5	1.5	3	4.5	1.9	0.03
1030T10	1.93	4.500	138	35	12	110.0	98.0	47.5	49.2	68.3	1.5	3	4.5	2.6	0.03
1040T10	3.22	4.500	230	43	12	117.5	104.6	50.8	57.1	70.0	1.5	3	4.5	3.4	0.05
1050T10	5.63	4.500	403	50	12	138.0	123.6	60.3	66.7	79.5	1.5	3	4.5	5.4	0.05
1060T10	8.85	4.350	634	55	19	150.5	130.0	63.5	76.2	92.0	1.5	3	4.5	7.3	0.09
1070T10	13	4.125	922	65	19	161.9	155.4	76.2	87.3	95.0	1.5	3	4.5	10	0.11
1080T10	27	3.600	1.901	78	27.0	194.0	180.8	88.9	104.8	116.0	1.5	3	4.5	18	0.17
1090T10	48	3.600	3.456	95	27.0	213.0	199.8	98.4	123.8	122.0	1.5	3	6	25	0.25
1100T10	81	2.400	5.818	107	41	250.0	245.7	120.6	142.0	155.5	1.5	3	6	42	0.43
1110T10	121	2.250	8.641	117	41	270.0	258.5	127.0	160.3	161.5	1.5	4.5	9.5	54	0.51
1120T10	177	2.025	12.674	136	60	308.0	304.4	149.2	179.4	191.5	1.5	4.5	9.5	81	0.73
1130T10	257	1.800	18.434	165	67	346.0	329.8	161.9	217.5	195.0	1.5	6	12.5	121	0.91
1140T10	370	1.650	26.499	184	67	384.0	371.6	182.8	254.0	201.0	1.5	6	12.5	178	1.13
1150T10	515	1.500	36.869	203	108	453.1	371.8	182.9	269.2	271.3	1.5	6	12.5	234	1.95
1160T10	724	1.350	51.847	228	120.7	501.4	402.2	198.1	304.8	278.9	1.5	6	12.5	317	2.81
1170T10	965	1.225	69.129	279	133.4	566.4	437.8	215.9	355.6	304.3	1.5	6	12.5	448	3.49
1180T10	1.338	1.100	95.858	311	152.4	629.9	483.6	238.8	393.7	321.1	1.5	6	12.5	619	3.76
1190T10	1.770	1.050	126.736	339	152.4	675.6	524.2	259.1	436.9	325.1	1.5	6	12.5	776	4.40
1200T10	2.413	900	172.822	361	177.8	756.9	564.8	279.4	497.8	355.6	1.5	6	12.5	1.057	5.62